



# Study of traffic management strategies in the Zürich area

Javier Ortigosa

Kathrin Arnet, Qiao Ge, Monica Menendez

Traffic Engineering (SVT) group

# Why cities are often congested?

Introduction

Background

Research

Conclusions



HOME POLITICS BUSINESS SWISS NEWS TRAVEL & CULTURE SCI & TECH SPORT

[The Changing Face of Religion](#) | [Little islands of Romansh](#) | [Extraordinary Exiles](#)

You are in: [swissinfo.ch](#) » [swiss news](#) » Zurich streets among Europe's most congested

Like 18

Jul 7, 2011 - 21:25

## Zurich streets among Europe's most congested

by Matthew Allen in Zurich, [swissinfo.ch](#)

**Zurich car drivers spend more time stuck in traffic jams than in most other European cities, but the city is unrepentant about its pedestrian friendly policy.**

A recent survey has revealed that more than a quarter of roads in Switzerland's main business conglomeration are clogged, putting Zurich in 16th place in the list of most congested cities.

The survey by Dutch navigation system maker TomTom comes days after a critical report in the New York Times accusing Zurich of "working overtime in recent years to torment drivers".

The article reports that traffic lights are programmed to favour trams while pedestrian crossings have been moved from underground passages to street level.


The TomTom analysis found that daytime traffic on 27.4 per cent of Zurich city's streets was forced to travel less than 70 per cent as fast as during the night when roads are less busy. Brussels came out worst in the report with nearly 40 per cent of its streets congested.



Everyone needs to learn to share the streets (Keystone)

RELATED STORIES

- [Green groups aim to reclaim cities from cars](#)
- [Bumps in road could slow motorway plans](#)
- [Move to ban pollutant cars gathers pace](#)

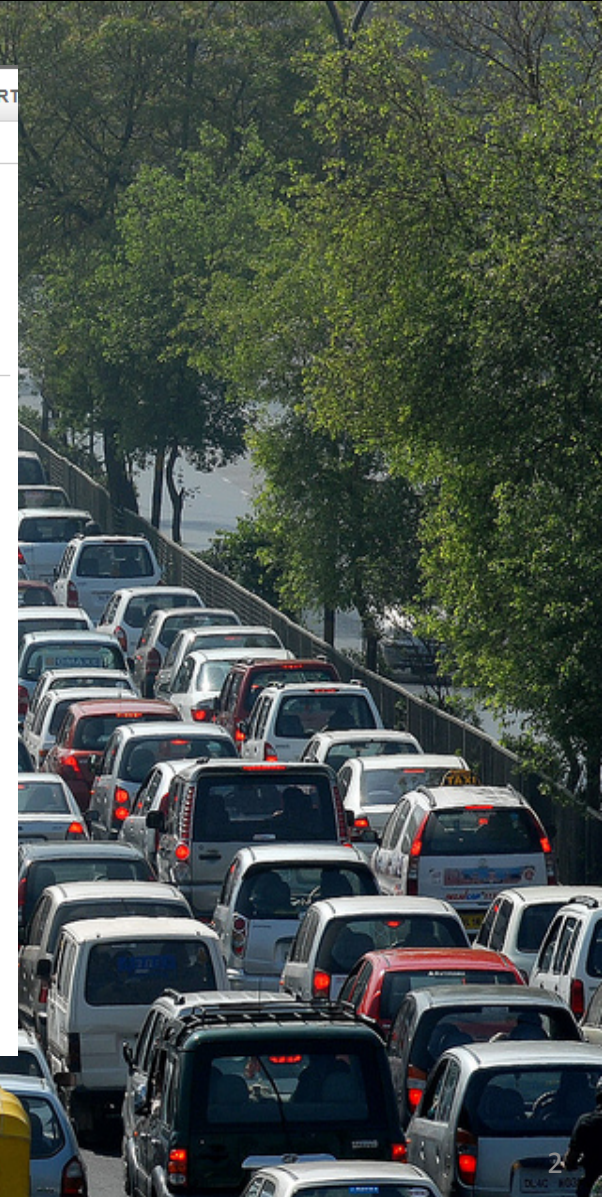

# Why cities are often congested?

Introduction

Background

Research

Conclusions

Because the capacity of the street network is not able to cope with all the traffic demand

- Cities concentrate **many activities** in a small area
- **Commuters**, typically, create the biggest traffic problems
- Normally, the worst scenarios happen on working days in the **morning** and in the **evening peaks**
- Traffic congestion has a huge **impact on the quality of living** in cities
- How can we **address** this situation?
  - Better and more rational planning of cities and transport systems
  - Promotion of more sustainable transport modes
  - Pricing strategies
  - **More efficient operations** →

MACROSCOPIC CONTROL OF CITIES



# The city of Zürich employs an innovative traffic access control system

## Introduction


## Background

## Research

## Conclusions

The adaptive control system works in the following way:

- Measurement of the **level of service** (LOS) in certain links in the city
- Detection of a **LOS change**
- Modification of **traffic signal control** in the roads accessing the city

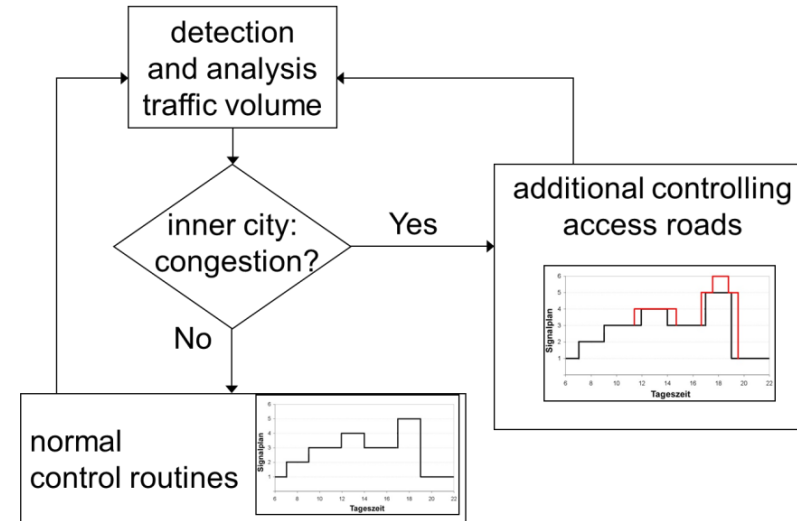

- ▷ This system represents a clear step towards more **efficient urban operations**
- ▷ However, since 2007 **has not been upgraded**
- ▷ A more tailored and **dynamic system** could be implemented



# Does it make sense to control the number of cars in a city? What does the research say?

Introduction

**Background**

Research

Conclusions

Initial macroscopic models linking some city features to flows and speeds:

- Smeed 1966
- Thomson 1967
- Wardrop 1968
- Zahavi 1972

Two fluid models linking the number of vehicles and the speeds

- Herman and Ardekani 1984
- Herman and Prigogine 1979
- Ardekani and Herman 1987

These models were more focused on the uncongested branch of the diagram... **but what happens when we reach congestion?**

Urban Gridlock in cities, definition of the Macroscopic Fundamental Diagram:

- Daganzo 2006
- Geroliminis and Daganzo 2008
- Daganzo and Geroliminis 2008



# The Macroscopic Fundamental Diagram (MFD) is an operational scheme for network capacity control


Introduction

Background

Research

Conclusions

- Certain city areas have a relationship between the accumulation of vehicles and the number of trips ended, following a **Macroscopic Fundamental Diagram (MFD)**

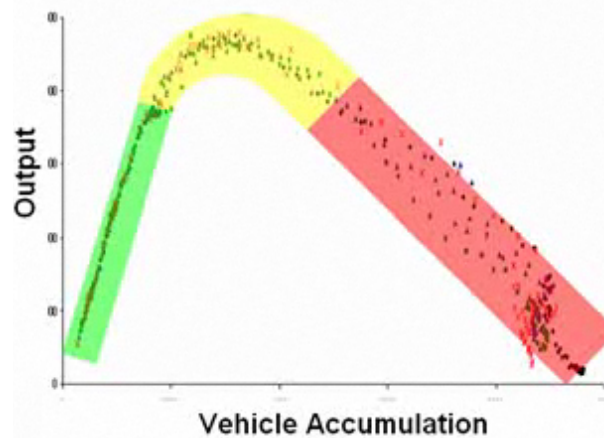

- That allows to know (through **monitoring**) how the urban area is **performing**
- If the perimeter of this area is controlled, the **system** can be moved to more **uncongested scenarios**
- In contrast to ZüriTraffic, the MFD continuously assesses the traffic states within the city and **can adapt easily** to the **capacity** and **traffic requirements**

# How do we create a MFD for Zürich?

Introduction

Background


Research

Conclusions

The **trip production rate** in the network is proportional to the **weighted flows** measured in the loop detectors:


**YOKOHAMA EXPERIMENT:**  
(Geroliminis and Daganzo, 2008)

For every time  
slice  $\Delta t$   
(e.g. 5 min)

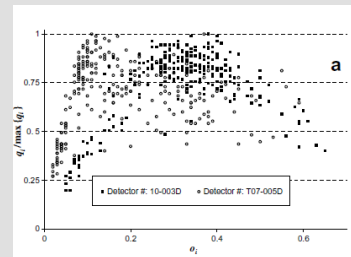

Collect flow and density for  
every loop detector

Average  
these values  
for all loop  
detectors

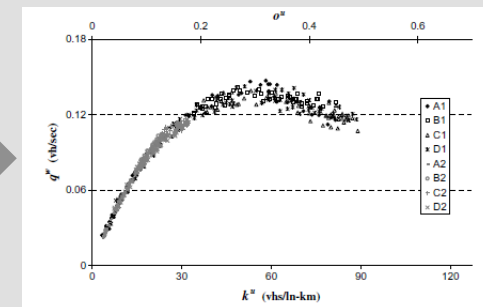

MFD

- The Traffic Engineering group is working with a **VISSIM simulation** of the Zürich inner city
- We have used that model to create **different evening demand scenarios** to build the MFD
- To ensure the existence of a well defined MFD the **city must fulfill certain conditions** of homogeneity

# Is it possible to create a MFD for Zürich?


## We have used a VISSIM simulation for that

Introduction

Background

Research

Conclusions

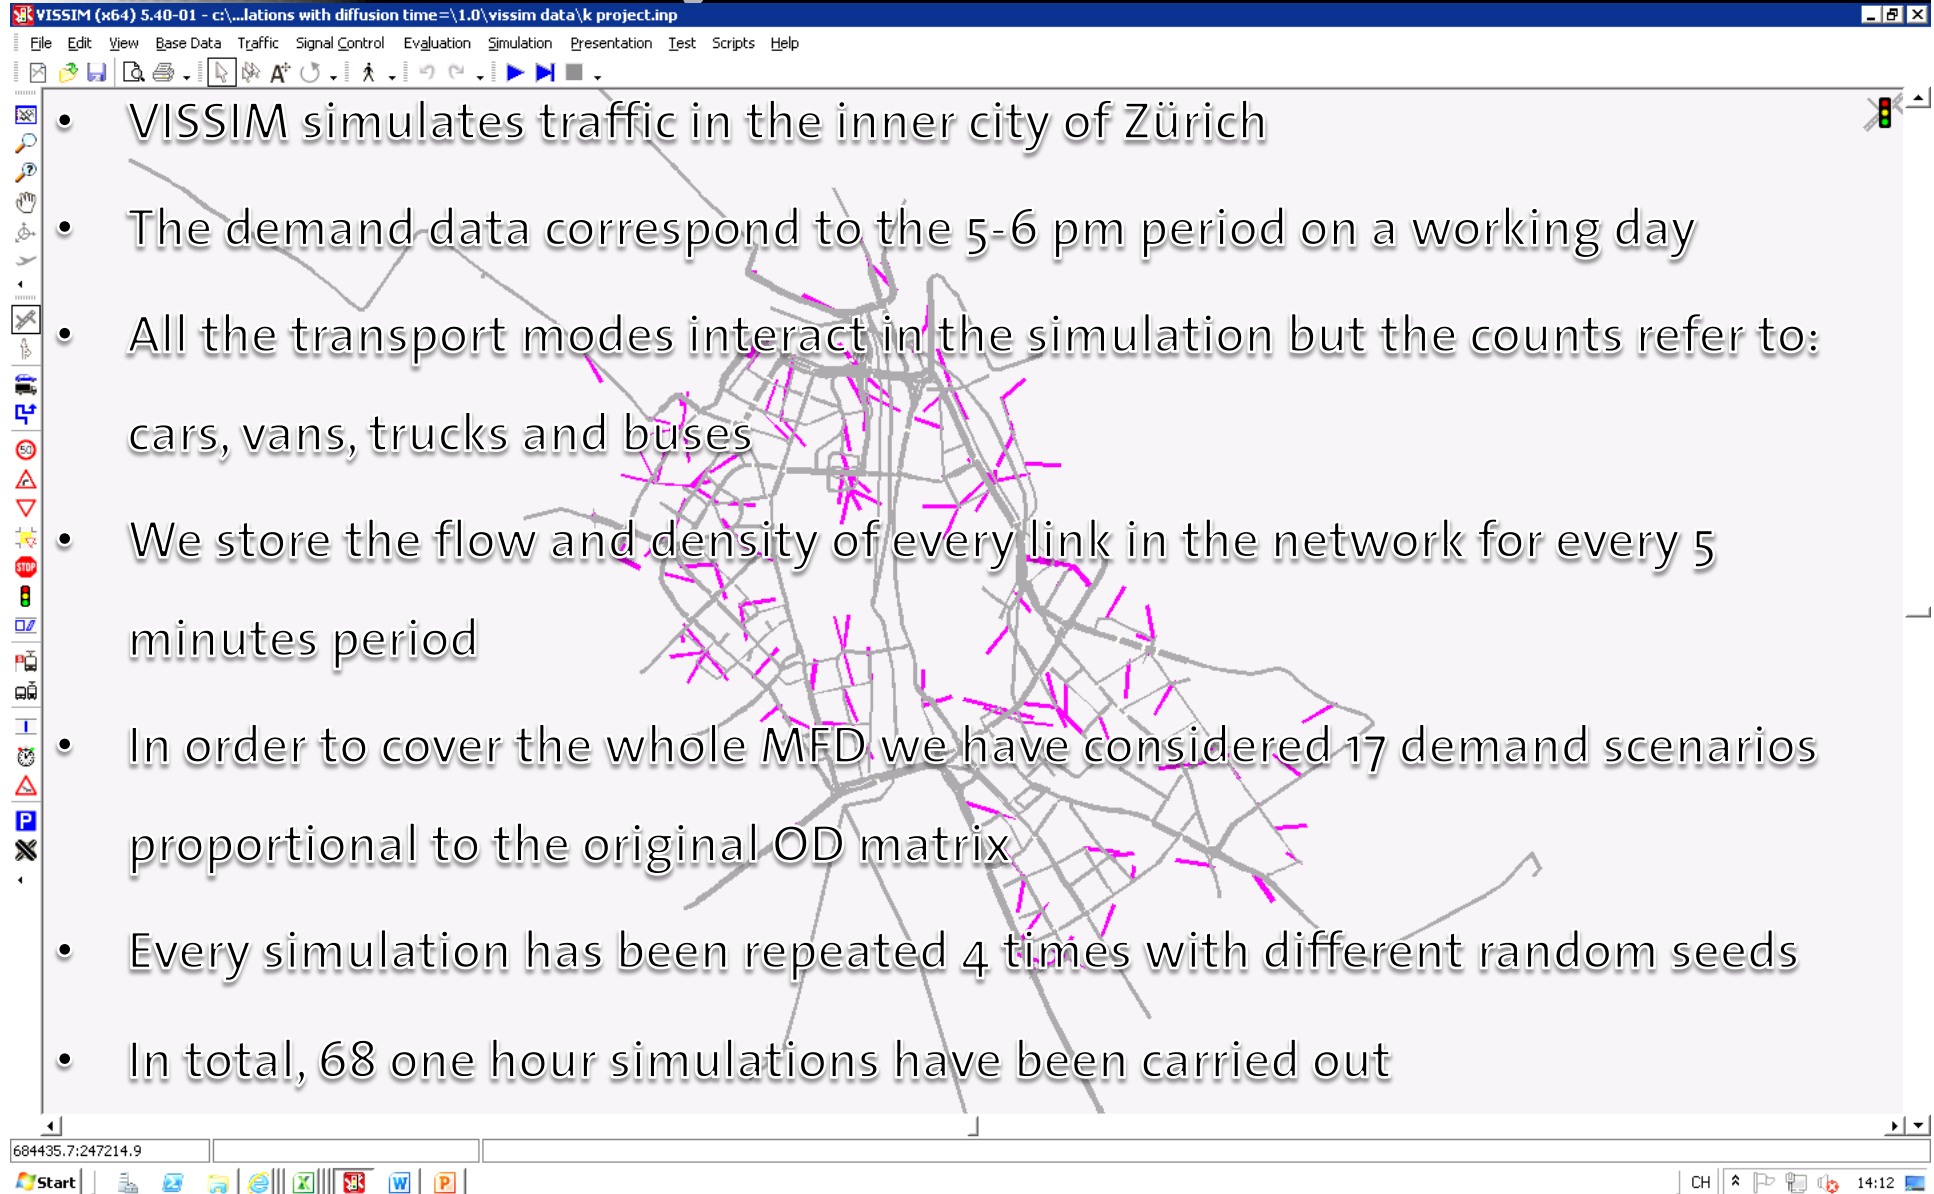

VISSIM (x64) 5.40-01 - c:\...lations with diffusion time=\1.0\visvim data\k project.inp

File Edit View Base Data Traffic Signal Control Evaluation Simulation Presentation Test Scripts Help

- VISSIM simulates traffic in the inner city of Zürich
- The demand data correspond to the 5-6 pm period on a working day
- All the transport modes interact in the simulation but the counts refer to: cars, vans, trucks and buses
- We store the flow and density of every link in the network for every 5 minutes period
- In order to cover the whole MFD we have considered 17 demand scenarios proportional to the original OD matrix
- Every simulation has been repeated 4 times with different random seeds
- In total, 68 one hour simulations have been carried out

684435.7:247214.9

Start | CH | 14:12




# The MFD for the inner city of Zürich from VISSIM:

Introduction

Background

Research

Conclusions

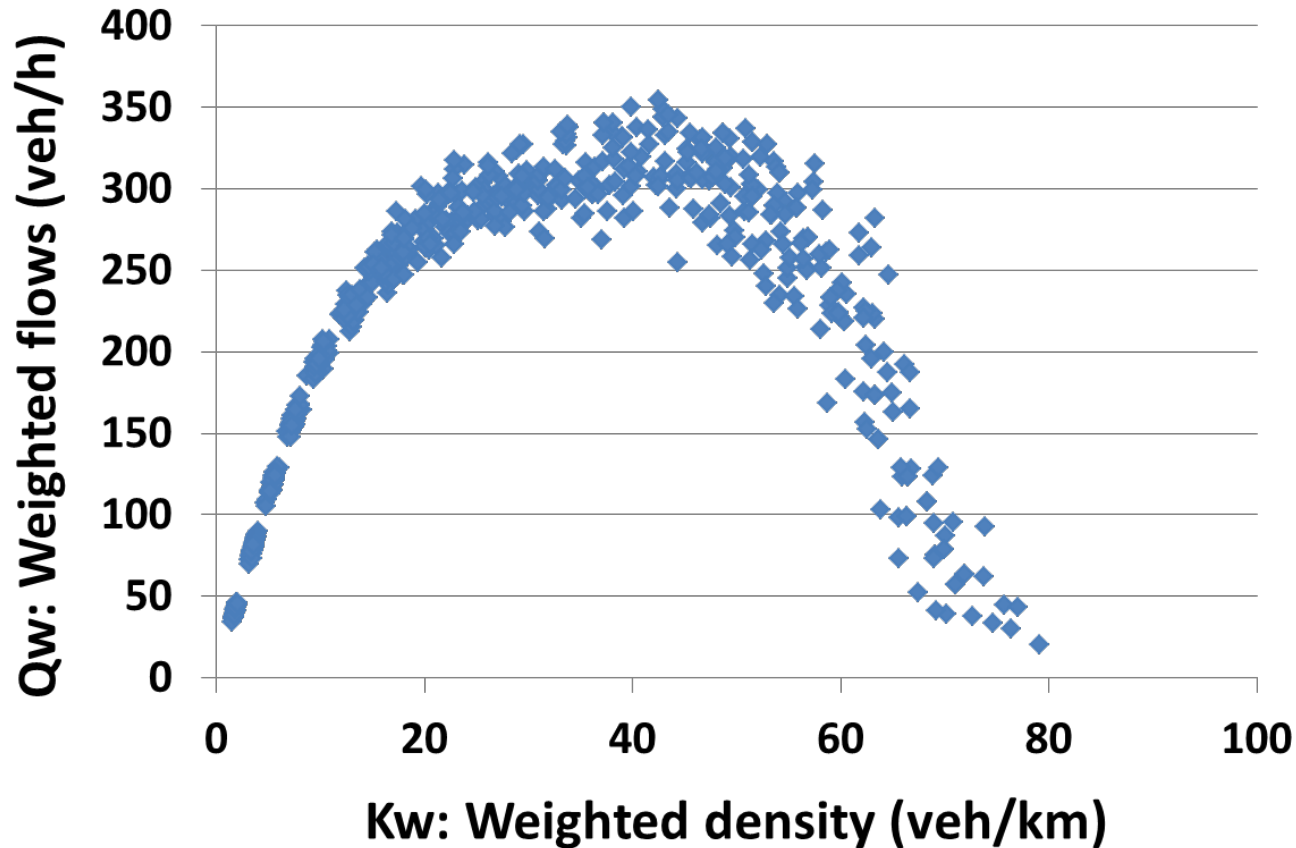

$$Q_w = \frac{\sum_i q_i \cdot l_i}{\sum_i l_i} \quad K_w = \frac{\sum_i k_i \cdot l_i}{\sum_i l_i}$$

$q_i$ : flow of the link  $i$   
 $l_i$ : length of the link  $i$

$k_i$ : density of the link  $i$   
 $l_i$ : length of the link  $i$




# The MFD for the inner city of Zürich from VISSIM:

Introduction

Background

Research

Conclusions

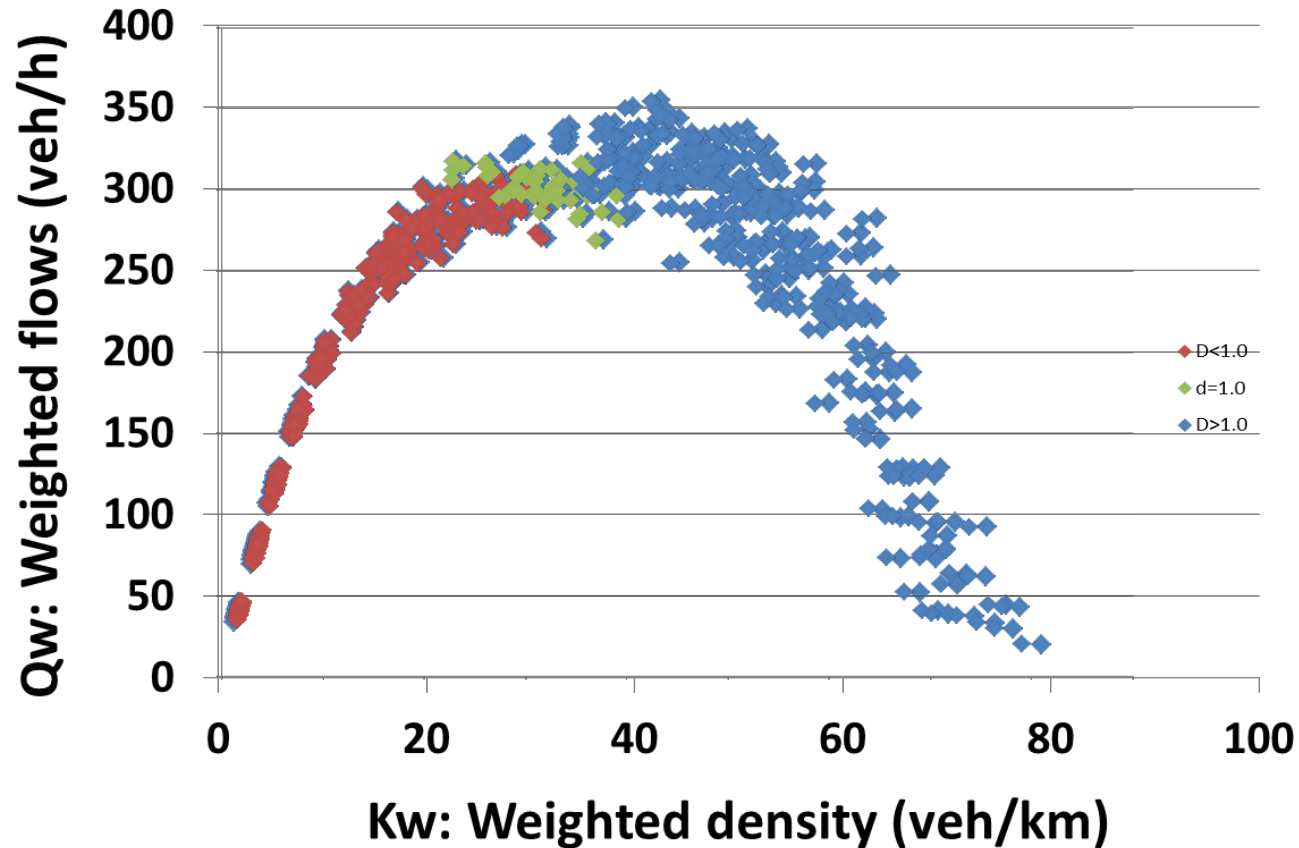

$$Q_w = \frac{\sum_i q_i \cdot l_i}{\sum_i l_i} \quad K_w = \frac{\sum_i k_i \cdot l_i}{\sum_i l_i}$$

$q_i$ : flow of the link  $i$   
 $l_i$ : length of the link  $i$

$k_i$ : density of the link  $i$   
 $l_i$ : length of the link  $i$



# Which factors have influenced the shape, size, and accuracy of this MFD?


Introduction

Background

Research

Conclusions

- Non realistic links
- Resolution
- Random seed
- Warm-up time
- VISSIM calibration
- Fixed traffic light scheme
- Demand factors

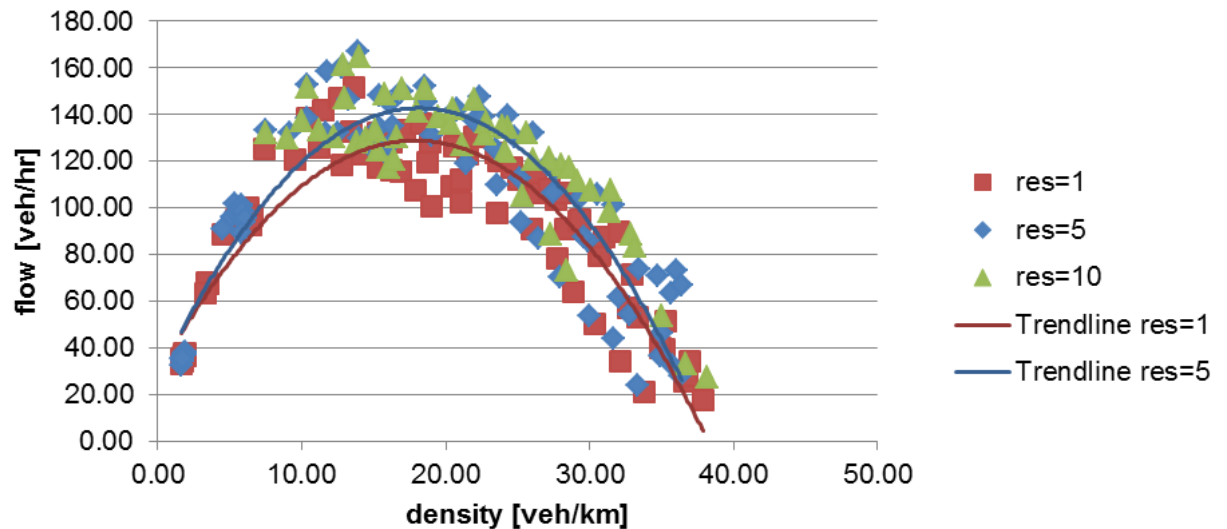

# The MFD presents some scattering in the congested part

Introduction

Background



Research

Conclusions

- We consider **different demand factors** (e.g. times 3) but keeping the **same route choice** model
- **Increasing the demand** also increases the **disappearance** rate of the system
- The **congestion propagation** has clear effects on the **heterogeneity** of traffic states



*Mazlounian, Geroliminis and Helbing (2009) analyzed the effect that the variability of the congestion spread has on the MFD*

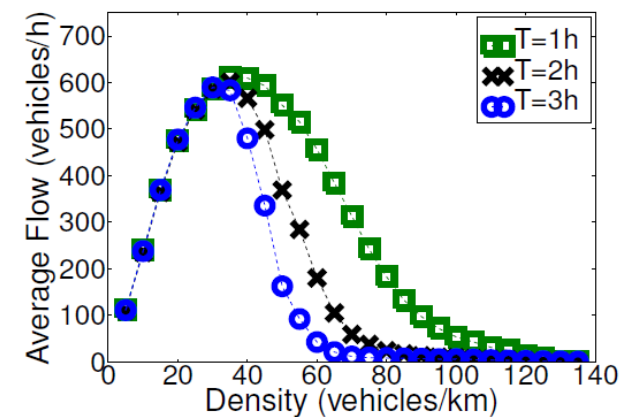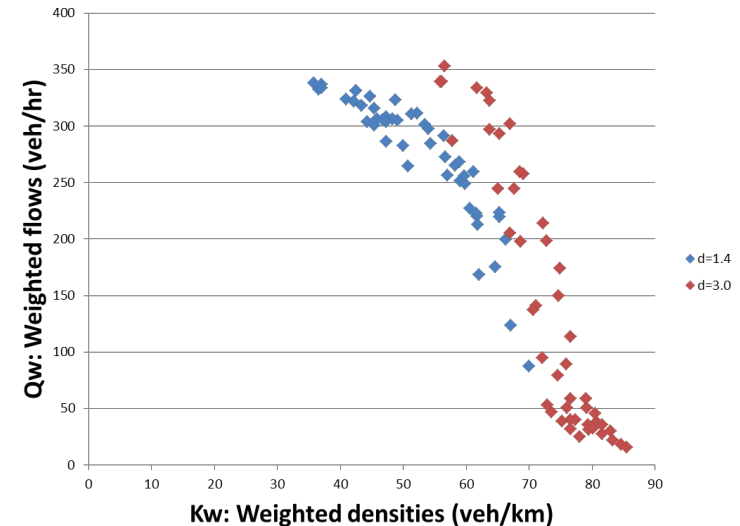

# How can a MFD with real data be obtained?

Introduction

Background

Research

Conclusions

Obtaining the MFD from the microsimulation model presents certain inaccuracies, which could be avoided with real data.

- The real data needed to obtain a consistent MFD is provided by traffic measures at **loop detectors**
- It is necessary that the **loop detector network** is **dense** and homogeneous enough so all the network is measured
- The city of **Zürich** has **3500 loop detectors**, a rather large number for a city of its size

# How many detectors would be necessary?



Introduction

Background

Research

Conclusions

- VISSIM considers **1707 links** to build the MFD
- We have chosen **6** different combinations of **25, 50, 75, 100, 125, 150, 175, 200, 225, and 250** random links...
- ...To see how a MFD created with a **limited number** of detectors could look **compared** to the one obtained monitoring **all links**

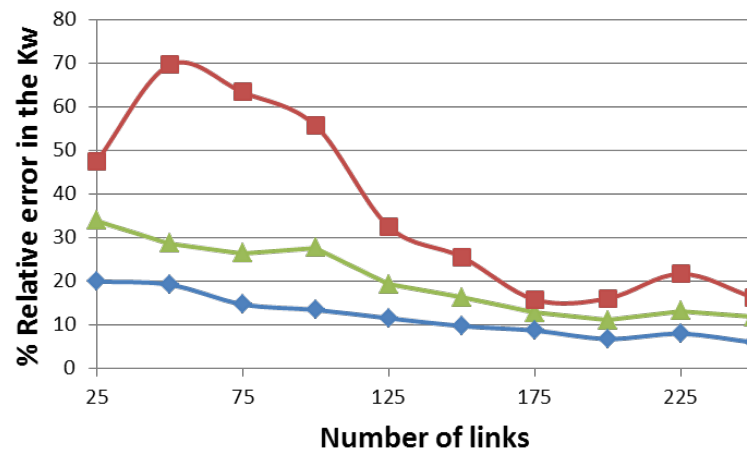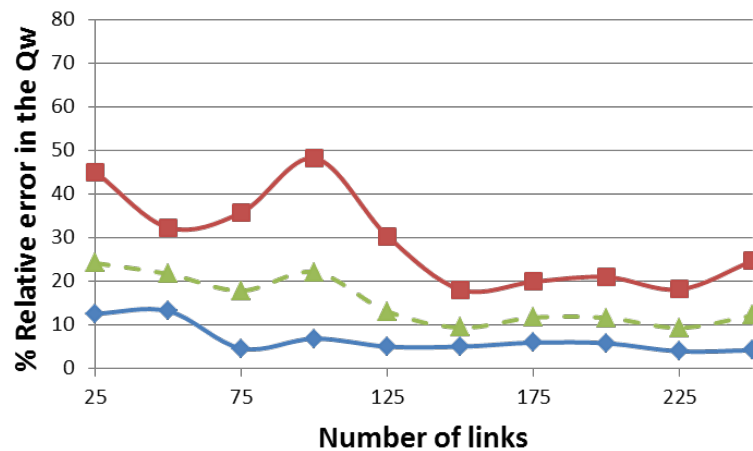


Maximum value      Average value      Minimum value

- With **less than 150** links the **variability** might be considerable



# How can we use the MFD?

A Macroscopic perimeter control is a flexible and responsive mechanism to ensure a certain congestion state in the city

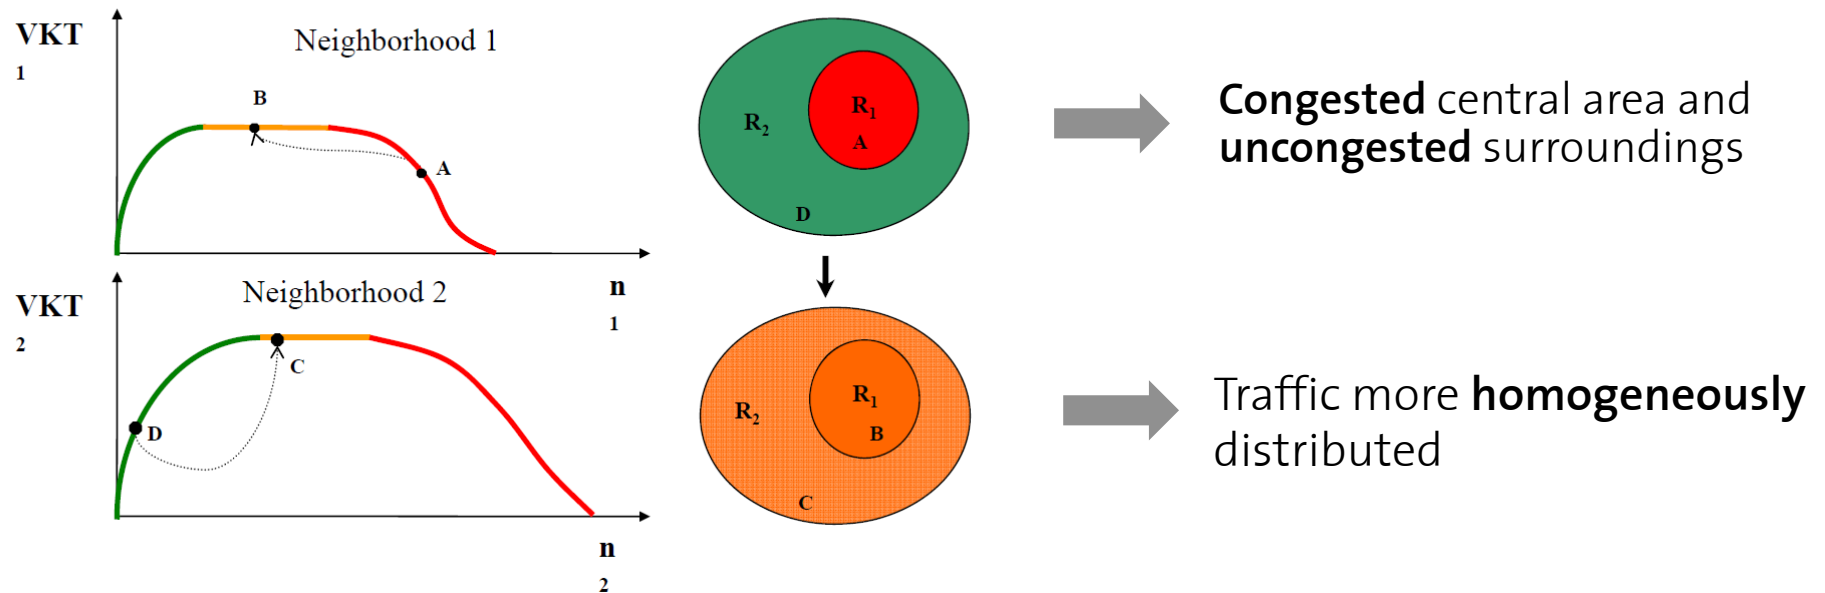

Let's compare it to the adaptive control system!

# How similar are the MFD and the adaptative control strategies?


Introduction

Background

Research

Conclusions

We have chosen 2 of the **links** that are measured by **Zürittraffic**, and we plot their **individual fundamental diagrams** with the VISSIM simulation data:

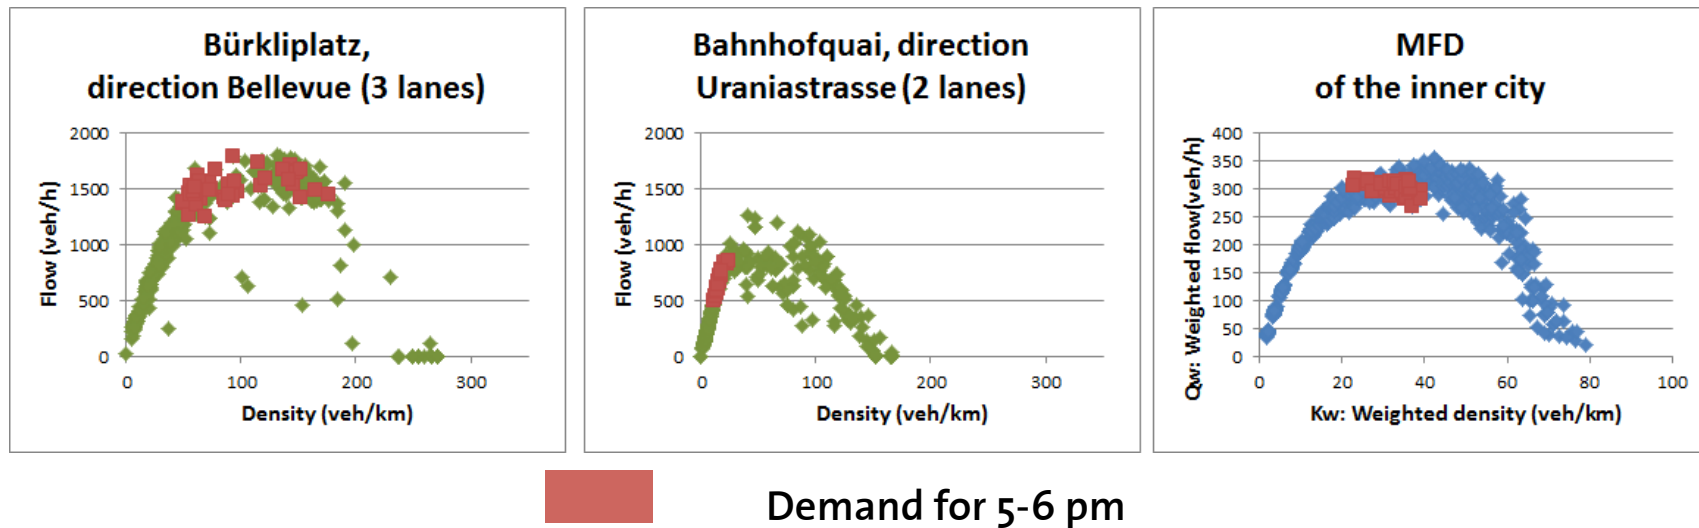

- The two links present **different shapes** and **reach congestion at different times**

*The MFD, in contrast to the Zürittraffic, might provide a better global view of the system*



# What steps the city of Zürich can take towards more efficient traffic management?

Introduction

Background

Research

Conclusions

- The city of **Zürich** has **3500 loop detectors**, a rather large number for a city of its size
- The **monitoring** scheme needs very **efficient IT systems** to bring and process the information **at real time**
- With a better data gathering and more focus on the analysis of these data, **innovative traffic management techniques could be applied** (MFD as a ground for the ZüriTraffic)
- That amount of detectors not only is enough for building a MFD, but if the data was efficiently collected, new traffic management techniques and **cutting edge research could be carried out**



**ZürichLAB**



# Questions?

Introduction

Background

Research

Conclusions

Thank you!

